
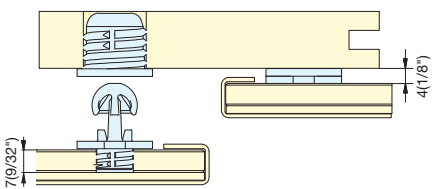

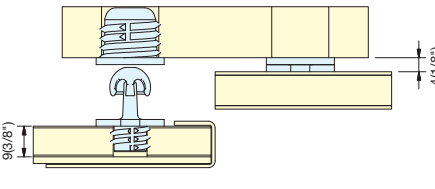

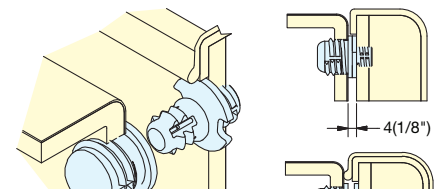

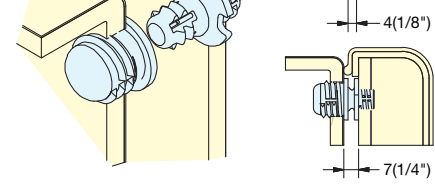

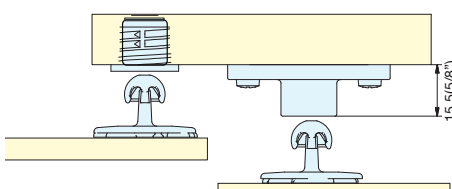

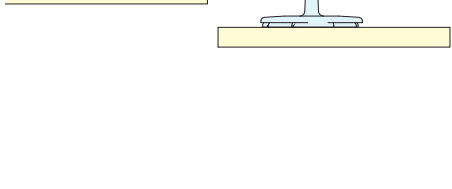


STANDARD PROFILE RANGE SERIES

FASTMOUNT
 PANEL MOUNTING SOLUTIONS

Male Clips			
Item No.	Dimensions	Diagram	Description
PC-M1B 			SELF TAPPING Pull Out Force: 11 lbs (5 kg) Material: White acetal copolymer Box: 100 Carton: 1,000 Installation tool: CT-10 (Sold separately) Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1 Mounts into: 3/8" (10 mm) hole drilled with CT-01 or CT-09
PC-M2H 			SELF TAPPING HEAVY DUTY Minimum panel thickness: 11/32" (9 mm) Pull Out Force: 22 lbs (10 kg) Material: Black acetal copolymer Box: 100 Carton: 500 Installation tool: CT-10 (Sold separately) Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1 Mounts into: 3/8" (10 mm) drilled with CT-01 or CT-09
PC-VM1 			VARIO SELF TAPPING (Standard) Variable gap, high shear strength. Minimum panel thickness: 11/32" (9 mm) Pull Out Force: 11 lbs (5 kg) Material: White acetal copolymer/Nylon GF Box: 100 Carton: 500 Installation tool: CT-10 (Sold separately) Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1 Mounts into: 3/8" (10 mm) drilled with CT-01 or CT-09
PC-VMX 			VARIO SELF TAPPING (Heavy Duty) Variable gap, high shear strength. Minimum panel thickness: 11/32" (9 mm) Pull Out Force: 22 lbs (10 kg) Material: Black acetal copolymer/Nylon GF Box: 100 Carton: 500 Installation tool: CT-10 (Sold separately) Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1 Mounts into: 3/8" (10 mm) drilled with CT-01 or CT-09
PC-SM2 			SURFACE MOUNT Adhesive fix super-groove base. Pull Out Force: 11 lbs (5 kg) Material: White acetal copolymer Box: 100 Carton: 500 Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1
PC-SM2H 			SURFACE MOUNT HEAVY DUTY Adhesive fix super-groove base. Pull Out Force: 22 lbs (10 kg) Material: Black acetal copolymer Box: 100 Carton: 500 Fits into: PC-F1A, PC-SF1, PC-RF1, PC-AF1